

4-72型性能参数表

机号	转速 (r/min)	风量 (m³/h)	全压 (pa)	功率 (kw)	重量 (kg)
2.8A	2900	1131 1480 1828 2177 2356	994 933 835 702 606	1.1	53
	1450	565 740 914 1088 1178	248 233 208 175 151	0.37	50
3.2A	2900	1688 2209 2729 3250 3517	1300 1220 1091 918 792	1.5	69
	1450	884 1104 1365 1625 1758	324 304 272 229 198	0.55	69
3.5A	2900	2664 3405 4146 4887 5286	1578 1481 1343 1144 989	2.2	82
	1450	1332 1706 2073 2444 2634	393 369 335 285 247	0.75	79
4A	2900	4012 4973 5962 6924 7419	2014 1915 1723 1459 1320	5.5	145
	1450	2006 2487 2981 3462 3709	501 476 429 363 329	1.1	103
4.5A	2900	5712 7081 8489 9859 10562	2554 2428 2184 1849 1673	7.5	269
	1450	2856 3540 4245 4929 5281	634 603 543 460 416	1.1	121
5A	2900	7728 9928 12128 14328 15455	3187 3074 2792 2567 2019	11	234
	1450	3864 4964 6064 7164 7728	790 762 693 580 502	2.2	151
6A	1450	6677 8578 10478 12379 13353	1139 1099 999 836 724	4	187
	960	4420 5679 6938 8196 8841	498 481 437 366 317	1.5	177

4-79型性能参数表

机号	转速 (r/min)	风量 (m³/h)	全压 (pa)	功率 (kw)	重量 (kg)
3A	2900	1970 2430 2900 3480 3830	1196 1157 1068 910 725	1.5	57
	1450	990 1220 1450 1740 1910	304 284 265 225 176	0.55	58
3.5A	2900	3120 3860 4600 5520 6070	1627 1568 1460 1205 980	3	69
	1450	1560 1930 2300 2760 3040	410 390 363 304 245	0.75	69
4A	2900	4670 5760 6860 8240 9080	2136 2048 1900 1578 1274	5.5	93
	1450	2330 2880 3430 4120 4540	529 510 480 392 323	1.1	82
4.5A	2900	6640 8200 9790 11720 12920	2696 2598 2412 2000 1618	11	96
	1450	3320 4110 4890 5860 6450	676 647 598 500 402	1.5	100
5A	2900	9100 11250 13410 16100 17720	3334 3216 2981 2471 2000	15	125
	1450	4560 5630 6710 8050 8860	833 804 745 617 500	2.2	125
6A	1450	8890 9740 11600 13920 15320	1196 1157 1068 892 706	5.5	160
	960	5830 6420 7680 9220 10100	529 509 470 402 313	1.5	137

4-72型性能参数表-续表

机号	转速 (r/min)	风量 (m³/h)	全压 (pa)	功率 (kw)	重量 (kg)
6C(E)	1800	8288 10648 13008 15367 16576	1760 1679 1543 1291 1116	7.5	335
	1600	7667 9465 11562 12637 14734	1389 1339 1217 1019 880	5.5	320
6C(E)	1250	5756 7395 9033 10672 11511	846 816 742 621 537	3	290
	1120	5157 6626 8094 9562 10314	679 655 595 498 431	2.2	285
6C(E)	1000	4605 5916 7227 8538 9209	541 522 474 397 344	2.2	285
7C(E)	1800	14660 16750 18930 20860 22263	2478 2348 2157 1968 1754	15	534
	1600	13032 15115 16340 17850 19790	1958 1850 1688 1530 1385	11	513
7C(E)	1250	10180 11520 12800 14140 15460	1195 1102 1004 926 846	5.5	458
	1000	8145 9200 10255 11350 12368	765 710 650 600 541	3	428
7C(E)	800	6519 7360 8200 9040 9895	490 458 420 380 346	1.5	417
8C(E)	1600	19450 21920 24430 26980 29540	2560 2390 2185 2015 1810	22	627
	1250	15200 17170 19140 21110 23080	1560 1445 1330 1215 1100	11	560
8C(E)	1120	13620 15370 17130 18890 20680	1255 1160 1070 975 888	7.5	518
	1000	12160 13850 15280 16830 18470	1000 945 870 790 705	5.5	505
8C(E)	900	10950 12390 13860 15130 16620	810 760 695 630 575	4	480

4-79型性能参数表-续表

机号	转速 (r/min)	风量 (m³/h)	全压 (pa)	功率 (kw)	重量 (kg)
7C(E)	1800	17400 20100 22550 25050 27600	2510 2360 2210 2060 1910	22	534
	1600	15460 17720 19980 22240 24500	1980 1860 1740 1620 1500	15	513
7C(E)	1250	10820 13340 15850 19160 20850	1206 1167 1078 902 715	7.5	458
	1120	9650 11950 14200 17200 18800	970 931 863 725 549	5.5	433
7C(E)	1000	8650 10660 12700 15300 16800	774 745 685 578 460	4	428
	900	7780 9600 11400 13800 15100	727 598 558 470 372	3	424
7C(E)	800	6920 8400 10160 12240 12440	500 470 441 372 294	2.2	417
8C(E)	1270	21500 26500 31600 38100 41700	2490 2422 2235 1837 1480	30	627
	1120	17100 21050 25100 30200 33100	1569 1529 1412 1176 930	15	560
8C(E)	1000	15050 18550 22100 26700 29200	1225 1186 1098 921 725	11	518
	900	13450 16550 19750 23800 26050	970 950 872 735 578	7.5	505
8C(E)	800	12100 14900 17800 21400 23500	784 764 706 598 470	5.5	480
	710	10760 13250 15800 19050 20850	617 608 558 470 353	4	475
8C(E)	600	9520 11750 14030 16900 18800	490 465 440 372 294	3	471

4-72型性能参数表-续表

机号	转速 (r/min)	风量 (m³/h)	全压 (pa)	功率 (kw)	重量 (kg)
10C(E)	1300	30880	2640	37	1100
		34880	2450		
		38880	2260		
		42880	2070		
		46880	1880		
	1170	27780	2140	30	1090
		31380	1985		
		34980	1830		
		38580	1670		
		42180	1510		
	1040	24700	1690	18.5	1000
		27900	1570		
		31100	1450		
		34300	1330		
		37500	1210		
	940	22310	1380	15	965
		25210	1280		
		28110	1180		
		31010	1080		
		33910	980		
	830	19710	1075	11	940
		22265	995		
		24820	915		
		27375	835		
		29930	755		
	740	17560	855	7.5	901
		19840	785		
		22120	725		
		24400	665		
		26680	605		
	660	15680	680	5.5	904
		17710	630		
		19740	580		
		21770	530		
		23800	480		
12C(E)	1040	42680	2430	55	1629
		49210	2250		
		55740	2070		
		62270	1890		
		68800	1720		
	940	38570	1990	37	1485
		45570	1840		
		48570	1690		
		52570	1540		
		58570	1390		
	830	34060	1550	22	1450
		38475	1435		
		42890	1320		
		44305	1205		
		51720	1090		
	740	30370	1230	18.5	1422
		34300	1140		
		38240	1050		
		42170	960		
		46110	870		
	660	27080	980	11	1350
		30690	910		
		34100	840		
		37610	770		
		41125	700		
	580	23800	755	7.5	1320
		26885	700		
		29970	645		
		33050	590		
		36140	535		
	520	21340	610	5.5	1286
		24110	565		
		26880	520		
		29650	475		
		32420	430		


4-79型性能参数表-续表

机号	转速 (r/min)	风量 (m³/h)	全压 (pa)	功率 (kw)	重量 (kg)
10C(E)	1300	38500	2660	55	1104
		44750	2450		
		51000	2240		
		57250	2030		
		63500	1820		
	1170	34600	2160	37	1090
		40225	1990		
		45850	1820		
		51475	1650		
		57100	1480		
	940	27850	1390	18.5	964
		32360	1280		
		36870	1170		
		41380	1060		
		45890	950		
	830	24550	1080	15	943
		28540	995		
		32530	910		
		36520	825		
		40510	740		
	740	21900	860	11	901
		25450	790		
		29000	720		
		32550	650		
		36100	590		
	660	19500	680	7.5	904
		22675	630		
		25850	580		
		29025	530		
		32200	475		
	580	17160	530	5.5	893
		25515	490		
		22730	450		
		19945	410		
		28300	380		
12C(E)	1040	53300	2440	75	1630
		61925	2250		
		70550	2060		
		79180	1870		
		87800	1680		
	940	48200	1990	55	1486
		62400	1794		
		69600	1676		
		74600	1490		
		79300	1360		
	830	42500	1560	37	1452
		55200	1402		
		61500	1304		
		65900	1167		
		70100	1060		
	740	37900	1240	22	1422
		49200	1108		
		54800	1039		
		58700	931		
		62400	840		
	660	33800	980	18.5	1349
		43800	882		
		48900	823		
		52400	735		
		55700	670		
	580	29700	770	11	1321
		38500	686		
		43000	637		
		46100	568		
		48900	520		
	520	26650	615	7.5	1286
		34500	549		
		38550	509		
		41300	450		
		43900	410		


4-72型性能参数表-续表

机号	转速 (r/min)	风量 (m³/h)	全压 (pa)	功率 (kw)	重量 (kg)
14E	830	57900	2070	55	2660
		66200	1813		
		74500	1573		
		82800	1323		
	740	91140	1083	37	2470
		51650	1650		
		59050	1450		
		66450	1250		
	660	73850	1050	30	2285
		81250	860		
		46030	1308		
		52640	1150		
	580	59250	955	18.5	2285
		65860	840		
		72470	685		
		40480	1010		
	520	46280	890	15	2260
		52080	770		
		57880	650		
		63680	530		
	470	36270	425	11	2212
41480		522			
46680		618			
51880		715			
420	57100	812	7.5	2184	
	32800	660			
	37500	580			
	42200	500			
16E	830	46900	420	90	3554
		51600	340		
		29298	277		
		33500	340		
		37700	405		
	740	41900	466	75	3464
		46118	530		
		86440	2700		
		98840	2380		
		111240	2060		
	660	123640	1740	55	3069
		136040	1420		
		77040	1124		
		88100	1380		
		99160	1636		
580	110220	1892	37	2882	
	121290	2148			
	68720	1709			
	78590	1510			
	88190	1301			
520	97830	1098	22	2724	
	108180	894			
	60390	1320			
	69060	1165			
	77730	1010			
470	86400	850	18.5	2694	
	95070	690			
	54145	1060			
	61920	9351			
	69690	806			
420	77460	680	15	2669	
	85230	555			
	48940	867			
	55965	760			
	62990	660			


(一)、4-72、4-79系列2.8A~6A离心风机外形图

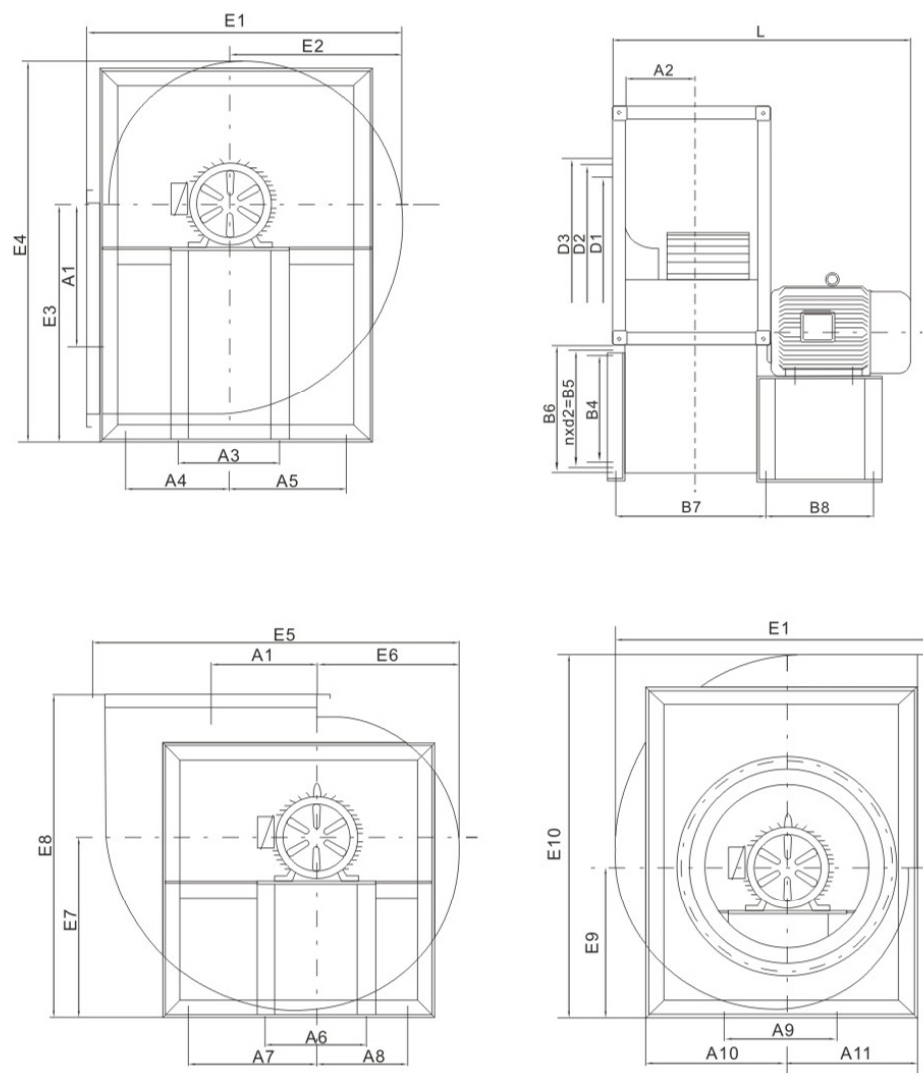

(二)、4-72、4-79系列6C~12C离心风机外形图

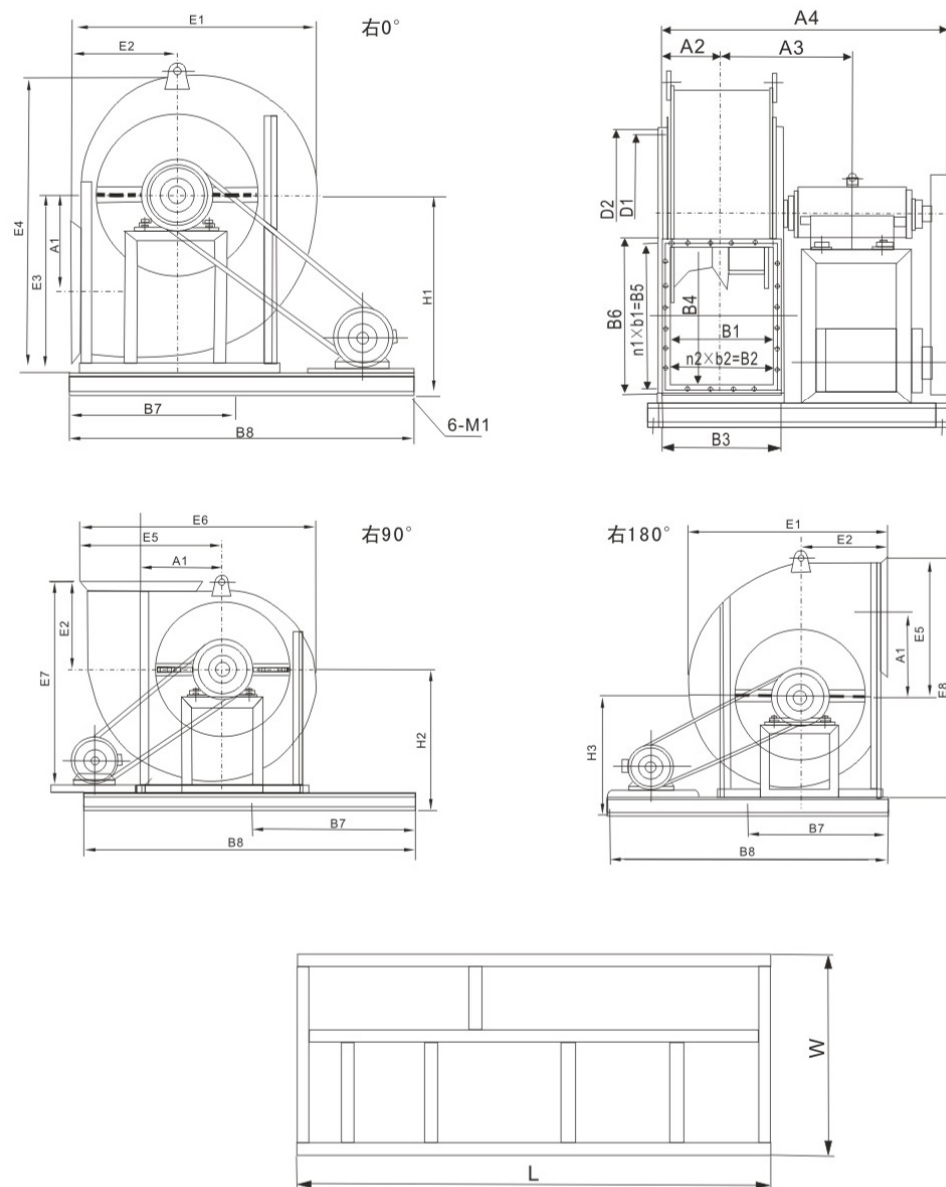

(三)、4-72、4-79系列14E~16E离心风机外形图

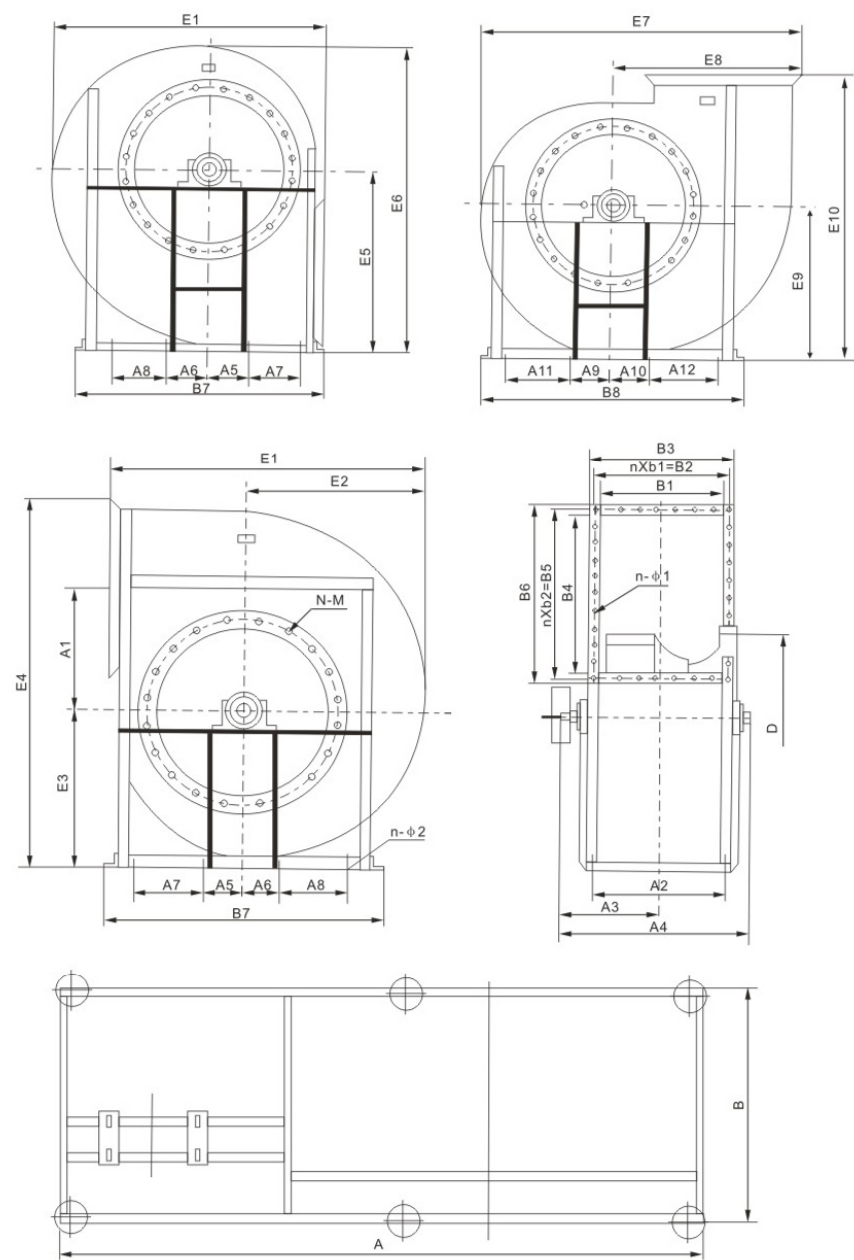

机号 NO	传动 方式	转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需功率 (kw)	电动机	
								型号	功率 (KW)
2.8	A	2900	1131	971	78.5	0.39	0.59	Y802-2	1.1
			1319	971	83.2	0.43	0.65		
			1508	961	86.5	0.47	0.71		
			1696	922	87.9	0.49	0.74		
			1885	853	86.1	0.52	0.76		
			2073	765	80.1	0.55	0.77		
		1450	2262	657	73.5	0.56	0.78	Y801-4	0.55
			565	245	78.5	0.049	0.07		
			660	245	83.2	0.054	0.08		
			754	235	86.5	0.057	0.09		
			848	226	87.9	0.060	0.09		
			942	216	86.1	0.066	0.10		
			1037	186	80.1	0.067	0.10		
			1131	167	73.5	0.071	0.11		
3.15	A	2900	1825	1246	79.9	0.79	1.11	Y90S-2	1.5
			2093	1246	84.3	0.86	1.20		
			2362	1226	87.3	0.92	1.29		
			2630	1177	88.6	0.97	1.36		
			2899	1098	87	1.02	1.37		
			3167	981	81.3	1.06	1.38		
		1450	3435	853	75.2	1.08	1.40	Y801-4	0.55
			912	314	79.9	0.10	0.14		
			1047	314	84.3	0.11	0.14		
			1181	304	87.3	0.11	0.14		
			1315	294	88.6	0.12	0.16		
			1449	275	87	0.13	0.17		
			1583	245	81.3	0.13	0.17		
			1718	216	75.2	0.14	0.18		
3.55	A	2900	2708	1608	81.1	1.49	1.94	Y100L-2	3
			3092	1608	85.3	1.62	2.11		
			3477	1569	88.1	1.72	2.24		
			3861	1510	89.4	1.81	2.35		
			4245	1402	87.8	1.88	2.44		
			4629	1265	82.5	1.97	2.56		
		1450	5013	1108	76.7	2.01	2.41	Y801-4	0.55
			1354	402	81.1	0.19	0.29		
			1546	402	85.3	0.20	0.30		
			1738	392	88.1	0.21	0.35		
			1930	373	89.4	0.22	0.33		
			2122	353	87.8	0.24	0.36		
			2315	314	82.5	0.24	0.36		
			2507	275	76.7	0.25	0.38		
4	A	2900	3984	2069	82.3	2.78	3.34	Y112M-2	4
			4534	2060	86.2	3.01	3.61		
			5083	2010	88.9	3.19	3.83		
			5633	1932	90.0	3.36	4.03		
			6182	1795	88.6	3.48	4.18		
			6732	1628	83.6	3.64	4.37		
		1450	7281	1432	78.2	3.70	4.44	Y802-4	0.75
			1992	520	82.3	0.35	0.53		
			2267	510	86.2	0.37	0.56		
			2542	500	88.9	0.40	0.60		
			2816	481	90.0	0.42	0.53		
			3091	451	88.6	0.44	0.66		
			3366	402	83.6	0.42	0.68		
			3641	353	78.2	0.46	0.69		

机号 NO	传动 方式	转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需功率 (kw)	电动机	
								型号	功率 (KW)
4.5	A	2900	5790	2658	83.3	5.13	5.90	Y132S-2	7.5
			6573	2628	87.0	5.51	6.34		
			7355	2569	89.5	5.86	6.74		
			8137	2462	90.5	6.15	7.07		
			8920	2295	89.2	6.37	7.33		
			9702	2069	84.5	6.60	7.59		
		1450	10485	1836	79.4	6.72	7.73	Y90S-4	1.1
			2895	667	83.3	0.64	0.90		
			3286	657	87.0	0.69	0.97		
			3678	638	89.5	0.73	1.02		
			4069	619	90.5	0.77	1.08		
			4460	569	89.2	0.79	1.11		
5	A	2900	4851	520	84.5	0.83	1.16	Y160M2-2	15
			5242	461	79.4	0.85	1.19		
			8050	3315	84.2	8.80	10.12		
			9123	3266	87.6	9.44	10.86		
			10197	3187	90.0	10.03	11.53		
			11270	3050	91.0	10.49	12.06		
		1450	12343	2844	89.8	10.86	12.49	Y100L1-4	2.2
			13416	2589	85.3	11.31	13.01		
			14490	2305	80.5	11.52	13.25		
			4025	824	84.2	1.09	1.42		
			4562	814	87.6	1.18	1.53		
			5098	794	90.0	1.25	1.63		
6.3	D	1450	5638	765	91.0	1.32	1.72	Y132S-4	5.5
			6172	716	89.8	1.37	1.78		
			6708	647	85.3	1.41	1.83		
			7245	579	80.5	1.42	1.89		
			8320	1324	84.8	3.61	4.42		
			9393	1304	88.1	3.86	4.73		
		960	10467	1275	90.5	4.09	5.01	Y112M-6	2.2
			11540	1216	91.4	4.26	5.22		
			12614	1138	90.2	4.42	5.41		
			13687	1040	85.9	4.60	5.63		
			14761	922	81.3	4.65	5.69		
			5508	579	84.8	1.04	1.38		
8	D	1450	6219	569	88.1	1.11	1.47	Y180M-4	18.5
			6930	559	90.5	1.19	1.58		
			7640	530	91.4	1.23	1.63		
			8351	500	90.2	1.29	1.71		
			9062	451	85.9	1.32	1.75		
			9773	402	81.3	1.34	1.78		
		960	17585	2158	85.7	12.29	14.4	Y132M2-6	5.5
			19783	2118	88.8	13.10	15.4		
			21982	2060	91.0	13.81	16.2		
			24179	1971	91.9	14.40	16.9		
			26378	1844	90.8	14.87	17.4		
			28576	1677	86.7	15.35	18.0		

机号 NO	传动 方式	转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需功率 (kw)	电动机	
								型号	功率 (KW)
8	D	730	8853	549	85.7	1.55	2.1	Y132M-8	3
			9960	539	88.8	1.65	2.2		
			11067	520	91.0	1.76	2.3		
			12173	500	91.9	1.84	2.4		
			13280	471	90.8	1.91	2.5		
			14287	422	86.7	1.94	2.57		
10	D	1450	15403	383	82.4	2.00	2.7	Y250M-4	55
			35420	3442	87.6	28.6	45.3		
			39713	3364	90.3	41.1	48.2		
			44006	3266	92.2	43.3	50.8		
			48299	3409	93.0	44.8	52.6		
			52593	2923	92.0	46.4	54.4		
		960	56886	2687	88.5	48.0	56.3	Y200L1-6	18.5
			61179	2422	84.7	48.6	57.0		
			23450	1510	87.6	11.2	13.1		
			26293	1481	90.3	12.0	14.1		
			29135	1432	92.2	12.6	14.8		
			31978	1363	93.0	13.0	15.3		
		730	34820	1275	92.0	13.4	15.7	Y160L-8	7.5
			37662	1177	88.5	13.9	16.3		
			40505	1059	94.7	14.1	16.5		
			17832	873	87.6	4.9	5.8		
			19993	853	90.3	5.2	6.14		
			22155	824	92.2	5.5	6.5		
12.5	D	960	24316	785	93.0	5.7	6.7	Y280M-6	55
			26478	736	92.0	5.9	6.9		
			28639	677	88.5	61.1	7.1		
			30801	618	84.7	6.2	7.3		
			45800	2354	87.6	34.20	40.13		
			51353	2305	90.3	36.40	42.71		
		730	56904	2236	92.2	38.32	44.94	Y225M-8	22
			62456	2128	93.0	39.69	46.58		
			68008	2001	92.0	41.07	48.19		
			73559	1834	88.5	42.33	49.67		
			79111	1657	84.7	42.99	50.45		
			34828	1363	87.6	15.05	17.66		
		730	39050	1334	90.3	16.02	18.80	Y225M-8	22
			43271	1295	92.2	16.87	19.80		
			47492	1236	93.0	17.52	20.56		
			51714	1157	92.0	18.06	21.19		
			55936	1059	88.5	18.59	21.81		
			60157	961	84.7	18.96	22.25		

机号 NO	风机 转速 (r/min)	流量 (m³/h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需 功率 kw	电动机		三角皮带			主轴 带轮	电动机 带轮	电动机 导轨
							型号	功率 kw	型号	根数	内周长 (mm)			
6.3C	2240	12852	3159	84.8	13.29	16.09	Y180M-2	22	B	5	2540	48-B5 -240	48-B5 -185	SHT-3
		14511	3109	88.1	14.22	17.21								
		16169	3030	90.5	15.03	18.19								
		17828	2893	91.4	15.67	18.96								
		19486	2707	90.2	16.24	19.65								
		21144	2491	85.9	16.89	20.44								
		22803	2197	81.3	17.11	20.80								
		11476	2511	84.8	9.43	11.42								
	2000	12956	2481	88.1	10.13	12.27	Y160M2-2	15	B	4	2540	48-B4 -240	42-B4 -170	SHT-2
		14437	2413	90.5	10.69	12.94								
		15917	2305	91.4	11.15	13.49								
		17398	2158	90.2	11.56	14.00								
		18879	1971	85.9	12.03	14.56								
		20359	1756	81.3	12.21	14.78								
		10328	2040	84.8	6.90	8.35								
		11660	2010	88.1	7.39	8.94								
	1800	12993	1952	90.5	7.78	9.42	Y160M1-2	11	B	3	2540	48-B3 -240	42-B3 -150	SHT-2
		14325	1863	91.4	8.11	9.82								
		15658	1746	90.2	8.41	10.19								
		16991	1589	85.9	8.73	10.56								
		18324	1422	81.3	8.90	10.77								
		9180	1608	84.8	4.83	5.85								
		10365	1589	88.1	5.19	6.28								
		11550	1550	90.5	5.49	6.65								
	1600	12734	1471	81.4	5.69	6.89	Y132S2-2	7.5	A	3	2540	48-A3 -240	38-A3 -135	SHT-2
		13918	1383	80.2	5.92	7.17								
		15103	1255	85.9	6.13	7.42								
		16287	1118	81.3	6.22	7.53								
		8032	1236	84.8	3.25	4.10								
		9069	1216	88.1	3.48	4.39								
		10105	1187	90.5	3.68	4.65								
		11142	1128	81.4	3.82	4.82								
	1400	12178	1059	80.2	3.97	5.02	Y132S-4	5.5	A	3	2718	48-A3 -240	38-A5 -240	SHT-2
		13215	961	85.9	4.11	5.19								
		14251	863	81.3	4.20	5.31								
		7172	981	84.8	2.30	2.91								
		8098	971	88.1	2.48	3.13								
		9024	942	90.5	2.61	3.29								
		9949	902	91.4	2.73	3.44								
		10874	863	90.2	2.82	3.57								
	1250	11799	765	85.9	2.92	3.69	Y112M-4	4	A	3	2718	48-A3 -240	28-A3 -212	SHT-1
		12724	687	81.3	2.98	3.77								
		6426	785	84.8	1.65	2.26								
		7255	775	88.1	1.77	2.42								
		8085	755	90.5	1.87	2.56								
		8913	726	1.4	1.97	2.69								
		9743	677	80.2	2.03	2.78								
		10572	618	85.9	2.11	2.88								
	1000	11401	549	81.3	2.14	2.93	Y100L2-4	3	A	2	2718	48-A2 -240	28-A3 -190	SHT-1
		5737	628	84.8	1.18	1.61								
		6478	618	88.1	1.26	1.73								
		7218	608	90.5	1.35	1.84								
		7958	579	81.4	1.40	1.91								
		8699	540	80.2	1.44	1.97								
		9439	490	85.9	1.50	2.05								
		10179	441	81.3	1.53	2.09								

机号 No	风机 转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需 功率 kw	电动机		三角皮带			主轴 带轮	电动机 带轮	电动机 导轨
							型号	功率 kw	型号	根数	内周长 (mm)			
6.3C	960	5164	510	84.8	0.862	1.27	Y90L-4	1.5	A	2	3175	48-A2 -240	24-A2 -150	SHT-1
		5830	500	88.1	0.919	1.35								
		6497	490	90.5	0.978	1.44								
		7163	471	81.4	1.02	1.40								
		7829	441	80.2	1.06	1.46								
		8496	402	85.9	1.10	1.51								
		9162	353	81.3	1.10	1.51								
		4590	402	84.8	0.60	0.89								
	800	5182	392	88.1	0.64	0.94	Y90S-4	1.1	A	2	3175	48-A2 -240	24-A2 -132	SHT-1
		5775	383	90.5	0.68	1.00								
		6367	373	81.4	0.72	1.06								
		6959	343	80.2	0.74	1.08								
		7552	314	85.9	0.77	1.13								
		8144	284	81.3	0.79	1.17								
		21830	3315	85.7	23.45	28.4								
		24559	3266	88.8	25.08	30.4								
8C	1800	27288	3178	91.0	26.46	32.0	Y225S-4	37	D	4	3658	65-D4 -315	60-D4 -600	SHT-3
		30016	3030	91.9	27.48	33.3								
		32745	2834	90.8	28.38	34.4								
		35474	2589	86.7	29.42	35.61								
		38202	2315	82.4	29.80	36.1								
		19404	2619	85.7	16.46	19.93								
		21830	2579	88.8	17.61	21.3								
		24256	2511	91.0	18.58	22.5								
	1600	26681	2393	91.9	19.29	23.4	Y200L-4	30	C	4	3658	65-C4 -315	55-C4 -355	SHT-3
		29108	2236	90.8	19.90	24.1								
		31532	2050	86.7	20.70	25.1								
		33958	1834	82.4	20.98	25.4								
		16979	2010	85.7	11.06	13.4								
		19101	1971	88.8	11.78	14.3								
		21224	1922	91.0	12.46	15.1								
		23346	1834	91.9	12.94	15.7								
8C	1400	25468	1716	90.8	13.37	16.2	Y180M-4	18.5	C	4	3658	65-C4 -315	48-C4 -315	SHT-3
		27591	1569	86.7	13.87	16.8								
		29713	1402	82.4	14.04	17.0								
		15159	1599	85.7	7.85	9.5								
		17054	1569	88.8	8.42	10.1								
		18949	1530	91.0	8.85	10.7								
		20844	1461	91.9	9.020	11.1								
		22739	1363	90.8	9.48	11.5								
	1250	24634	1246	86.7	9.83	11.9	Y160L-4	15	B	4	3556	65-B4 -315	42-B4 -280	SHT-2
		26528	1118	82.4	9.99	12.1								
		13583	1286	85.7	5.65	6.8								
		15281	1265	88.8	6.05	7.3								
		16979	1226	91.0	6.35	7.7								
		18677	1177	91.9	6.64	8.0								
		20375	1098	90.8	6.84	8.3								
		22073	1000	86.7	7.07	8.6								
1000	23770	892	82.4	7.15	8.7	Y132M-4	7.5	B	4	3556	65-B4 -315	38-B4 -225	SHT-2	
	12128	1020	85.7	4.00	5.1									
	13644	1010	88.8	4.31	5.4									
	15160	981	91.0	4.54	5.7									
	16676	932	91.9	4.70	5.9									
	18192	873	90.8	4.86	6.1									
	19708	794	86.7	5.01	6.1									
	21224	716	82.4	5.12	6.2									

机号 No	风机 转速 (r/min)	流量 (m³/h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需 功率 kw	电动机		三角皮带			主 轴 带 轮	电 动 机 带 轮	电 动 机 导 轨
							型号	功率 kw	型号	根数	内周长 (mm)			
8C	900	10915	834	85.7	2.95	3.7	Y132S-4	5.5	B	2	3556	65-B2 -315	38-B2 -200	SHT-2
		12279	814	88.8	3.13	4.0								
		13644	794	90.0	3.31	4.2								
		15008	755	91.0	3.42	4.3								
		16373	706	90.8	3.54	4.5								
		17738	647	86.7	3.68	4.7								
	800	19101	579	82.4	3.72	4.8	Y112M-4	4	B	2	3556	65-B2 -315	28-B2 -180	SHT-1
		9702	657	85.7	2.07	2.6								
		10915	638	88.8	2.18	2.8								
		12128	628	90.0	2.32	2.9								
		13340	598	91.0	2.41	3.0								
		14554	559	90.8	2.49	3.1								
	710	15767	510	86.7	2.58	3.3	Y100L2-4	3	B	2	3556	65-B2 -315	28-B2 -160	SHT-1
		16979	461	82.4	2.64	3.3								
		8611	520	85.7	1.45	2.0								
		9687	510	88.8	1.52	2.1								
		10763	490	90.0	1.61	2.2								
		11840	471	91.0	1.68	2.3								
	630	12916	441	90.8	1.74	2.4	Y100L1-4	2.2	B	2	3556	65-B2 -315	28-B2 -150	SHT-1
		13992	402	86.7	1.80	2.5								
		15069	363	82.4	1.84	2.5								
		7641	402	85.7	1.00	1.4								
		8596	402	88.8	1.08	1.5								
		9551	392	90.0	1.14	1.6								
10C	1250	10506	373	91.0	1.18	1.6	Y225S-4	37	D	4	4572	65-D4 -400	60-D4 -355	SHT-3
		11461	343	90.8	1.20	1.6								
		12416	314	86.7	1.25	1.7								
		13371	284	82.4	1.28	1.7								
		30534	2560	87.6	24.8	30								
		34235	2501	90.3	26.3	31.9								
	1120	37936	2422	92.2	27.7	33.5	Y200L-4	30	D	4	4572	65-C4 -400	55-D4 -315	SHT-3
		41637	2315	93.0	28.8	34.8								
		45338	2167	92.0	29.7	35.9								
		49040	1991	88.5	30.6	37.1								
		52740	1795	84.7	31.0	37.6								
		27358	2050	87.6	17.8	21.5								
	1000	30674	2010	90.3	19.0	23.0	Y180L-4	22	C	4	4318	65-B4 -400	48-C4 -280	SHT-3
		33990	1942	92.2	19.9	24.1								
		37307	1854	93.0	20.6	25.0								
		40623	1736	92.0	21.3	25.8								
		43939	1599	88.5	22.0	26.7								
		47256	1442	84.7	22.3	27.0								
	900	24427	1638	87.6	12.7	15.4	Y160L-4	15	B	4	4318	65-B4 -400	42-B4 -250	SHT-2
		27338	1599	90.3	13.5	16.3								
		30349	1550	92.2	14.2	17.1								
		33310	1484	93.0	14.7	17.8								
		36270	1383	92.0	15.1	18.3								
		39233	1275	88.5	15.7	19.0								

机号 No	风机 转速 (r/min)	流量 (m³/h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需 功率 kw	电动机		三角皮带			主轴 带轮	电动机 带轮	电动机 导轨
							型号	功率 kw	型号	根数	内周长 (mm)			
10C	800	19541	1049	87.6	6.50	7.87	Y160M-4	11	B	4	4521	64-B4 -400	42-B4 -224	SHT-2
		21910	1020	90.3	6.87	8.31								
		21279	991	92.2	7.24	8.77								
		26648	942	93.0	7.49	9.07								
		29017	883	92.0	7.73	9.36								
		31385	814	88.5	8.02	9.70								
	710	33754	736	84.7	8.14	9.85	Y132M-4	7.5	B	4	4521	65-B4 -400	38-B4 -200	SHT-2
		17343	824	87.6	4.53	5.72								
		19446	804	90.3	4.81	6.07								
		21548	785	92.2	5.09	6.16								
		23650	745	93.0	5.26	6.37								
		25752	696	92.0	5.41	6.55								
	630	27854	647	88.5	5.66	6.85	Y132S-4	5.5	B	4	4521	65-B4 -400	38-B4 -180	SHT-2
		29956	579	84.7	5.68	6.88								
		15389	647	87.6	3.16	3.99								
		17254	638	90.3	3.38	4.27								
		19119	618	92.2	3.56	4.49								
		20985	588	93.0	3.69	4.66								
	560	22850	549	92.0	3.79	4.78	Y112M-4	4	B	3	4521	65-B3 -400	28-B3 -160	SHT-2
		24716	510	88.5	3.95	5.00								
		26581	461	84.7	4.02	5.08								
		13679	510	87.6	2.21	2.79								
		15337	500	90.3	2.36	2.98								
		16995	490	92.2	2.51	3.17								
500	18654	461	93.0	2.57	3.24	Y100M-4	3	B	3	4521	65-B3 -400	18-B3 -150	SHT-1	
	20311	432	92.0	2.65	3.34									
	21969	402	88.5	2.77	3.50									
	23627	363	84.7	2.81	3.57									
	12214	412	87.6	1.59	2.01									
	13694	402	90.3	1.69	2.14									
12.5C	1120	15175	392	92.2	1.78	2.26	Y280S-4	75	D	6	4572	75-D6 -500	75-D6 -400	SHT-4
		16655	372	93.0	1.85	2.34								
		18135	343	92.0	1.87	2.37								
		19616	341	88.5	1.93	2.44								
		21096	284	84.7	1.97	2.48								
		53434	3207	87.6	54.32	65.76							Y280M-4	
	59912	3138	90.3	57.82	69.99									
	66388	3040	92.2	60.79	73.59									
	72865	2903	93.0	63.16	76.45									
	79342	2717	92.0	65.06	78.45									
	85819	2501	88.5	67.34	81.51									
	1000	92296	2256	84.7	68.25	82.62	Y250M-4	55	D	5	4572	75-D5 -500	65-D5 -355	SHT-4
47710		2560	87.6	38.71	46.86									
53492		2501	90.3	71.14	49.80									
59276		2422	92.2	43.25	52.35									
65058		2315	93.0	44.96	54.43									
70841		2167	92.0	46.34	56.10									
900	76614	1991	88.5	47.6	57.94	Y280S-4	75	D	4	4572	75-D4 -475	75-D5 -355	SHT-4	
	82407	1795	84.7	48.49	58.70									
	42938	2069	87.6	28.17	34.10									
	48144	2030	90.3	30.06	35.38									
	53348	1961	92.2	31.51	38.15									
	58552	1873	93.0	32.75	39.61									
	63758	1756	92.0	33.78	40.90	Y280S-6	45	D	4	4572	75-D4 -475	75-D4 -475	SHT-4	
	68962	1618	88.5	35.01	42.39									
	74166	1451	84.7	35.29	42.72									

机号 No	风机 转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需 功率 kw	电动机		三角皮带			主 轴 带 轮	电 动 机 带 轮	电 动 机 导 轨
							型号	功率 kw	型号	根数	内周长 (mm)			
12.5C	800	38168	1638	87.6	19.82	23.99	Y225M-6	30	D	4	4572	75-D4 -500	60-D4 -425	SHT-3
		42794	1599	90.3	21.04	25.47								
		47420	1550	92.2	22.13	26.79								
		52046	1481	93.0	23.01	27.06								
		56673	1383	92.0	23.65	28.63								
		61300	1275	88.5	24.52	29.68								
		65926	1147	84.7	24.80	30.02								
		33874	1285	87.6	13.80	16.70	Y200L2-6	22	C	4	4572	75-C4 -500	55-C4 -375	SHT-3
	710	37980	1265	90.3	14.78	17.89								
		42086	1226	92.2	15.54	18.81								
		46191	1167	93.0	16.10	19.48								
		50297	1089	92.0	16.50	20.01								
		54403	1000	88.5	17.07	20.67								
		58509	902	84.7	17.31	20.95								
		30057	1010	87.6	9.62	11.75	Y180L-6	15	C	4	4572	75-C4 -500	48-C4 -330	SHT-3
	630	33700	991	90.3	10.27	12.43								
		37344	961	92.2	10.81	13.09								
		40987	912	93.0	11.16	13.51								
		44630	863	92.0	11.62	14.07								
		48273	794	88.5	12.03	14.57								
		51917	706	84.7	12.02	14.55								
		26717	804	87.6	6.81	8.24	Y160L-6	11	B	4	4521	75-B4 -500	42-B4 -300	SHT-2
	560	29956	785	90.3	7.23	8.75								
		33194	755	92.2	7.55	9.14								
		36433	726	93.0	7.89	9.56								
		39671	677	92.0	8.10	9.81								
		42910	628	88.5	8.45	10.23								
		46148	559	84.7	8.46	10.24								
		23855	638	87.6	4.82	6.60	Y160M-6	7.5	B	4	4521	75-B4 -500	42-B4 -265	SHT-2
	500	26746	628	90.3	5.16	6.25								
		29638	608	92.2	5.43	6.57								
		32529	579	93.0	5.62	6.80								
		35421	539	92.0	5.77	6.98								
		38312	500	88.5	6.01	7.28								
		41204	451	84.7	6.09	7.38								
		21469	520	87.6	3.54	4.47	Y132M2-6	5.5	B	4	4521	75-B4 -500	38-B4 -235	SHT-2
	450	24071	510	90.3	3.77	4.78								
		26674	490	92.2	3.94	4.98								
		29276	471	93.0	4.11	5.19								
		31879	441	92.0	4.25	5.37								
		34481	402	88.5	4.35	5.49								
		37083	363	84.7	4.41	5.57								
		19084	412	87.6	2.49	3.14	Y132M1-6	4	B	4	4521	75-B4 -500	38-B4 -212	SHT-2
	400	21397	402	90.3	2.65	3.34								
		23710	392	92.2	2.80	3.54								
		26023	373	93.0	2.90	3.66								
		28337	343	92.0	2.94	3.71								
		30650	314	88.5	3.02	3.81								
		32963	284	84.7	3.07	3.88								

机号 No	风机 转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需 功率 kw	电动机		三角皮带			主轴 带轮	电动机 带轮	电动机 导轨						
							型号	功率 kw	型号	根数	内周长 (mm)									
16B	960	96052	3864	87.6	118	142	Y355M2-6	200	D	7	6858	150-D7 -630	90-D7 -600	SHT-4						
		107694	3776	90.3	125	151														
		119337	3658	92.2	132	160														
		130980	3491	93.0	137	165														
		142623	3276	92.0	141	171														
		154265	3011	88.5	146	176														
		165908	2717	84.7	148	179														
	800	80043	2687	87.6	68	83	Y315M1-6	90	D	6	6858	150-D6 -630	80-D6 -530	SHT-4						
		89745	2628	90.3	73	88														
		99448	2540	92.2	76	92														
		109150	2422	93.0	79	96	Y315M2-6	110												
		118852	2275	92.0	82	99														
		128554	2089	88.5	84	102														
		138257	1883	84.7	85	103														
	710	71038	2118	87.6	48	58	Y315S-6	75							D	5	6858	150-D5 -630	80-D5 -475	SHT-4
		79649	2069	90.3	51	61														
		88260	2001	92.2	53	64														
		96871	1912	93.0	55	67														
		105481	1795	92.0	57	69														
		114092	1648	88.5	59	71														
		122703	1481	84.7	60	72														
	630	63034	1667	87.6	33	40	Y280M-6	55	D	5	6858	150-D5 -630	75-D5 -425	SHT-4						
		70675	1628	90.3	35	43														
		78315	1579	92.2	37	45														
		85956	1501	93.0	39	47														
		93596	1412	92.0	40	48														
		101237	1295	88.5	41	50														
		108877	1167	84.7	42	50														
	560	56030	1314	87.6	23.3	28.3	Y250M-6	37	D	5	6350	150-D5 -630	65-D5 -375	SHT-3						
		62822	1285	90.3	24.8	30.0														
69613		1246	92.2	26.1	31.6															
76405		1187	93.0	27.1	32.8															
83197		1118	92.0	28.1	34.0															
89988		1020	88.5	28.8	34.9															
96780		922	84.7	29.3	35.4															
500	50027	1049	87.6	16.6	20.1	Y225M-6	30	C	4	6350	150-C4 -630	60-C4 -355	SHT-3							
	56091	1030	90.3	17.8	21.5															
	62155	991	92.2	18.5	22.4															
	68219	951	93.0	19.4	23.5															
	74283	892	92.0	20.0	24.2															
	80346	814	88.5	20.5	24.8															
	86410	736	84.7	20.8	25.2															
450	45024	853	87.6	12.2	14.7	Y200L1-6	18.5	C	4	6350	150-C4 -630	55-C4 -300	SHT-3							
	50482	834	90.3	12.9	15.7															
	55939	804	92.2	13.5	16.4															
	61397	765	93.0	14.0	17.0															
	66854	716	92.0	14.4	17.5															
	72312	657	88.5	14.9	18.0															
	77769	598	84.7	15.3	18.5															

机号 No	风机 转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需 功率 kw	电动机		三角皮带			主 轴 带 轮	电 动 机 带 轮	电 动 机 导 轨
							型 号	功 率 kw	型 号	根 数	内 周 长 (mm)			
16B	400	40022	667	87.6	8.50	10.2	Y180L-6	15	C	4	6350	150-C4 -630	48-C4 -265	SHT-2
		44873	657	90.3	9.07	11.0								
		49724	638	92.2	9.55	11.6								
		54575	608	93.0	9.91	12.0								
		59426	569	92.0	10.2	12.4								
		64277	520	88.5	10.5	12.7								
	355	69128	471	84.7	10.7	12.9	Y160L-6	11	B	4	6069	150-B4 -630	42-B4 -236	SHT-2
		35519	530	87.6	5.96	7.22								
		39825	520	90.3	6.37	7.71								
		44130	500	92.2	6.65	8.05								
		48435	481	93.0	6.95	8.41								
		52741	451	92.0	7.18	8.69								
	315	57046	412	88.5	7.37	8.92	Y160M-6	7.5	B	4	6069	150-B4 -630	42-B4 -200	SHT-2
		61351	373	84.7	7.50	9.07								
		31517	412	87.6	4.12	5.2								
		35337	402	90.3	4.38	5.5								
		39158	392	92.2	4.63	5.8								
		42978	373	93.0	4.78	6.0								
20B	710	46798	353	92.0	4.99	6.3	Y355M-8	220	D	7	7620	150-D7 -800	100-D7 -800	SHT-4
		50618	324	88.5	5.14	6.49								
		54439	294	84.7	5.25	6.62								
		138747	3305	87.6	145	176								
		155565	3227	90.3	154	187								
		172383	3128	92.2	162	197								
	630	189200	2981	93.0	168	204	Y355M2-8	160	D	7	7620	150-D7 -800	90-D7 -710	SHT-4
		206018	2795	92.0	174	210								
		222836	2569	88.5	180	217								
		239654	2324	84.7	183	221								
		123113	2599	87.6	101	123								
		138036	2540	90.3	108	131								
	560	152959	2462	92.2	113	137	Y315M3-8	110	D	7	7620	150-D7 -800	80-D7 -630	SHT-4
		167882	2354	93.0	118	143								
		182805	2207	92.0	122	147								
		197728	2030	88.5	126	151								
		212650	1824	84.7	127	154								
		109434	2060	87.6	71.4	86.5								
	500	122699	2010	90.3	75.9	91.8	Y315M2-8	75	D	5	7112	150-D5 -800	80-D5 -560	SHT-4
		135964	1952	92.2	79.9	96.7								
		149228	1854	93.0	82.6	100								
		12493	1746	92.0	85.6	104								
		175758	1599	88.5	88.2	107								
		189023	1442	84.7	89.3	108								
20B	280	97709	1638	87.6	50.7	61.4	Y200L-8	15	C	3	6858	150-C3 -800	55-C3 -315	SHT-3
		109553	1599	90.3	53.8	65.2								
		121396	1550	92.2	56.7	68.5								
		133240	1481	93.0	58.9	71.3								
		145083	1393	92.0	61.0	73.8								
		156927	1275	88.5	62.8	76.0								
	250	168770	1147	84.7	63.5	76.9	Y180L-8	11	B	3	6858	150-B3 -800	48-B3 -280	SHT-2
		48855	412	87.6	6.38	7.72								
		54776	402	90.3	6.77	8.20								
		60698	392	92.2	7.17	8.68								

机号 No	风机 转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	内效率 (%)	内功率 (kw)	所需 功率 kw	电动机		三角带			主轴 带轮	电动机 带轮	电动机 导轨
							型号	功率 kw	型号	根数	内周长 (mm)			
20B	450	87938	1324	87.6	36.9	44.7	Y315S-8	55	D	4	7112	150-F4 -800	80-D4 -500	SHT-3
		97597	1295	90.3	39.3	47.5								
		109257	1255	92.2	41.3	50.0								
		119916	1197	93.0	42.8	51.9								
		130575	1128	92.0	44.4	53.8								
		141234	130	88.5	45.6	55.2								
		151893	932	84.7	46.4	56.2								
	400	78167	1049	87.6	26.0	31.5	Y280M-8	45	D	4	6858	150-D4 -800	75-D4 -450	SHT-3
		87642	1030	90.3	27.8	33.6								
		97117	991	92.2	29.0	35.1								
		106592	951	93.0	30.3	36.7								
		116067	892	92.0	31.3	37.8								
		125541	814	88.5	32.1	38.8								
	355	135016	736	84.7	32.6	39.4	Y250M-8	30	C	4	6858	150-C4 -800	65-C4 -400	SHT-3
		69373	824	87.6	18.1	21.9								
		77782	804	90.3	19.2	23.3								
		86191	785	92.2	20.4	24.7								
		94600	745	93.0	21.1	25.5								
		103009	696	92.0	21.6	26.2								
		111418	647	88.5	22.6	27.4								
	315	119827	579	84.7	22.7	27.5	Y225M-8	22	C	4	6858	150-C4 -800	60-C4 -355	SHT-3
		61557	647	87.6	12.6	15.3								
		69018	634	90.3	13.5	16.4								
		76480	618	92.2	14.2	17.2								
		83941	588	93.0	14.7	17.9								
91402		549	92.0	15.2	18.3									
98864		510	88.5	15.8	19.2									
280	106325	461	84.7	16.1	19.5	Y200L-8	15	C	3	6858	150-C3 -800	55-C3 -315	SHT-3	
	54717	510	87.6	8.85	10.70									
	61349	500	90.3	9.44	11.42									
	67982	490	92.2	10.04	12.15									
	74614	461	93.0	10.27	12.43									
	81247	432	92.0	10.58	12.81									
	87879	402	88.5	11.09	13.42									
250	94511	363	84.7	11.24	13.61	Y180L-8	11	B	3	6858	150-B3 -800	48-B3 -280	SHT-2	
	48855	412	87.6	6.38	7.72									
	54776	402	90.3	6.77	8.20									
	60698	392	92.2	7.17	8.68									
	66620	373	93.0	7.41	8.97									
	72542	343	92.0	7.52	9.10									
	78463	324	88.5	7.97	9.65									
84385	284	84.7	7.87	9.52										